


Product No.	Product Name	MODEL	DP	Parameters	Features	Picture
1	Smart Doorbell (LAN+POE+ WIFI)	H5TYF-C	5500	<ul style="list-style-type: none"> Front Panel: Aluminum + Tempering Glass Camera: 2M Pixels Infrared Light: Yes IR Cut: Yes Microphone: 1 Speaker: 1 RF Card Reader: 13.56MHz Ethernet Port: 1xRJ45, 10/100Mbps adaptive Power: DC12V/1A or PoE Installation: Wall-mounted Size: 180x101x35 mm Size: 157x78x27 mm Working Humidity: 10~90% Working Temperature: -30°C ~ +55°C Storage Temperature: -30°C ~ +70°C 	<ul style="list-style-type: none"> Multi-way Unlock: Card/App/Smart Monitor Call & Talk: With Monitor/ Management/ App Access Cards: up to 20000 Firmware upgrade Motion Detect: Support Day/Night Mode: Support Image Config: HD/SD, H.264/H.265 	
2	Smart Doorbell (LAN+POE)	H1TYF-C	5900	<ul style="list-style-type: none"> Operating Voltage: DC12V~DC48V/POE (compliant with national standards) Operating Current: <500mA Operating Power: <6W Camera: 2MP, H.616V115 Illumination: Infrared illumination + IR CUT Compression Format: H.264/H.265 Input Method: Mechanical buttons Card Configuration: IC card Bell: Electronic bell >70db WiFi Connection: Optional TF Card: Optional Materials: Aluminum + ABS Operating Temperature: -20°C to +70°C 	<ul style="list-style-type: none"> Access Control Function: channel relay signal output, supports IC card swiping and indoor lock unlocking. Outputs dry contact signals, capable of controlling automatic doors, sliding doors, and door openers. Can control fingerprint locks (wireless 433 remote control); after adding a dedicated power supply for access control, can control mute locks/smart locks (4-core), electric locks (2-core), and electromagnetic locks (2-core). Cloud Video Intercom: Video calls with smart terminals (indoor units) and management terminals. Optional Functions: Mobile App Video Call: During the call, image capture and video recording are available. Motion Detection: Captures images of strangers lingering and uploads them to the mobile app. 	
3	Smart Doorbell (LAN+Wi-Fi, POE)	H1TYF-CW	6900	<ul style="list-style-type: none"> Installation Method: Embedded or surface-mounted wall installation IP Rating: IP65 waterproof and dustproof rating Access Card Capacity: 2000 Package Dimensions: 315x165x75mm Main Unit Dimensions: 150x85x28mm 		
4	Smart Intercom Call Station	H51TYF-C	10500	<ul style="list-style-type: none"> Front Panel: Aluminum Display: 5 Inch IPS LCD Camera: 2M pixels Dual-lens HD camera RS485 Port: Support RF Card Reader: 13.56MHz Relay Out: 1 Microphone: 1 Speaker: 1 Ethernet Port: 1xRJ45, 10/100Mbps adaptive Power: DC12V/3A IP Level: IP65 Installation: Wall-mounted Size: 200x95x20mm Working Humidity: 10~90% Working Temperature: -30°C ~ +55°C Storage Temperature: -30°C ~ +70°C 	<ul style="list-style-type: none"> Mode: Keypad or Directory call mode Multi-way Unlock: Facial/ Card/ PIN/ App Call & Talk: With Monitor/ Management/ App Access Records: up to 10000 DIR listings: DIY contact. Firmware upgrade Motion Detect: Support Day/Night Mode: Support Image Config: HD/SD, H.264/H.265 	
5	Smart Intercom Call Station (LAN+WIFI)	H51TYF-CW	11800	<ul style="list-style-type: none"> Optional Features: Wi-Fi module, 4G module 		
6	Smart Intercom Call Station	H8TYF-CR	12800	<ul style="list-style-type: none"> Front Panel: Aluminum Display: 8 Inch IPS LCD Camera: 2M pixels Dual-lens HD camera RS485 Port: Support RF Card Reader: 13.56MHz Relay Out: 1 Microphone: 1 Speaker: 1 Ethernet Port: 1xRJ45, 10/100Mbps adaptive Power: DC12V/3A IP Level: IP65 Installation: Wall-mounted Size: 270x132x20mm Working Humidity: 10~90% Working Temperature: -30°C ~ +55°C Storage Temperature: -30°C ~ +70°C 	<ul style="list-style-type: none"> Mode: Keypad or Directory call mode Multi-way Unlock: Facial/ Card/ PIN/ App Call & Talk: With Monitor/ Management/ App Access Records: up to 10000 DIR listings: DIY contact. Firmware upgrade 	
7	Smart Intercom Call Station (LAN+WIFI)	H8TYF-CRW	13800	<ul style="list-style-type: none"> Optional Features: Wi-Fi module is optional 		
8	Smart Monitor (LAN+Wi-Fi)	P7007PRO-W	4800	<ul style="list-style-type: none"> Front Panel: ABS + Tempering Glass Display: 7 Inch IPS LCD Input: 4-way input Microphone: 1 Speaker: 1 Ethernet Port: 1xRJ45, 10/100Mbps adaptive Power: DC12V/1A or PoE Installation: Wall-mounted Size: 210x145x20mm Working Humidity: 10~90% Working Temperature: -30°C ~ +55°C Storage Temperature: -30°C ~ +70°C 	<ul style="list-style-type: none"> Video Intercom: Videointercom with indoor monitor/ apartment ip call station/ Mini ip call station/ Main Entry Station/ Guard station. Remote Unlock: Remote release the locks linked with different types of stations (Mini/ Apartment/ Main Entry). Monitoring: Monitoring IP call stations in the same system, and linked IP Cameras (Live video in 4-Split display, Max 16 IP Cameras). Featured function. SOS Call: Call guard station/ Management center, Call Mobile App (Featured function) Internal Intercom (Audio): Call and Talk with other monitors/ stations in the same system. Elevator Control: Call elevator (Up & Down) Link with elevator for visitors. Cloud Intercom (Optional): Visitors' calling could be forwarded to Mobile App. Information Release: Management software releases text messages to all the indoor monitors/ selected monitors in the same system. Photos capture/ Video recording: Video record/ Photos capture during video intercom from indoor monitor/ Mobile App, stored in local device. Alarm Input (No power): 4-way input, supports for Emergency alarms/ Gas Alarm/ Smoke Alarm/ Infrared Alarm/ Entry Doorbell/ SOS buttons etc. 	
9	Smart Monitor (LAN+Wi-Fi+TUVA)	P7007PROTY-W	4980	<ul style="list-style-type: none"> Optional Features: Wi-Fi module, RS485 		
10	Smart Monitor (LAN+Wi-Fi)	P10PRO-W	6500	<ul style="list-style-type: none"> Front Panel: Aluminum + Tempering Glass Display: 10.1 Inch IPS LCD Input: 4-way input Microphone: 1 Speaker: 1 Ethernet Port: 1xRJ45, 10/100Mbps adaptive Power: DC12V/1A or PoE Installation: Wall-mounted Size: 272x180x20 mm Working Humidity: 10~90% Working Temperature: -30°C ~ +55°C Storage Temperature: -30°C ~ +70°C 	<ul style="list-style-type: none"> Video Intercom: Videointercom with indoor monitor/ apartment ip call station/ Mini ip call station/ Main Entry Station/ Guard station. Remote Unlock: Remote release the locks linked with different types of stations (Mini/ Apartment/ Main Entry). Monitoring: Monitoring IP call stations in the same system, and linked IP Cameras (Live video in 4-Split display, Max 16 IP Cameras). Featured function. SOS Call: Call guard station/ Management center, Call Mobile App (Featured function) Internal Intercom (Audio): Call and Talk with other monitors/ stations in the same system. Elevator Control: Call elevator (Up & Down) Link with elevator for visitors. Cloud Intercom (Optional): Visitors' calling could be forwarded to Mobile App. Information Release: Management software releases text messages to all the indoor monitors/ selected monitors in the same system. Photos capture/ Video recording: Video record/ Photos capture during video intercom from indoor monitor/ Mobile App, stored in local device. Alarm Input (No power): 4-way input, supports for Emergency alarms/ Gas Alarm/ Smoke Alarm/ Infrared Alarm/ Entry Doorbell/ SOS buttons etc. 	
11	Smart Monitor (LAN+Wi-Fi+TUVA)	P10PROTY-W	6850	<ul style="list-style-type: none"> Optional Features: Wi-Fi module, RS485, Camera 		
12	Power Supply	ZS-DC124	800	<ul style="list-style-type: none"> Input Voltage: AC110~220V Output Voltage: DC12-14V Current: 4000mA Delay Time: 0~15S Temperature: -20°C ~ +45°C 	Electronic Lock Control	
13	Visor (8寸)	ZS-M8	1200	for H8		
14	Visor (5寸)	ZS-M5	1000	for H51		

Smart Monitor Kit



- Smart Monitor**
 - 4-way 1080P 30F, H.264/H.265
 - Supported Watch real-time video by Tuya App and Smart Monitor
 - Supported Watch history video by Tuya App
- NVR powered by Tuya**
 - Supported 1T-10T single disk, save data in disk
 - Supported Watch real-time/history video by Tuya App
 - 8-way 4K 30F, H.264/H.265
 - Supported ONVIF/GB28181 protocol
- IP Camera**
 - Majority 3rd-party brands are supported


Smart Home Doorbell For Villas

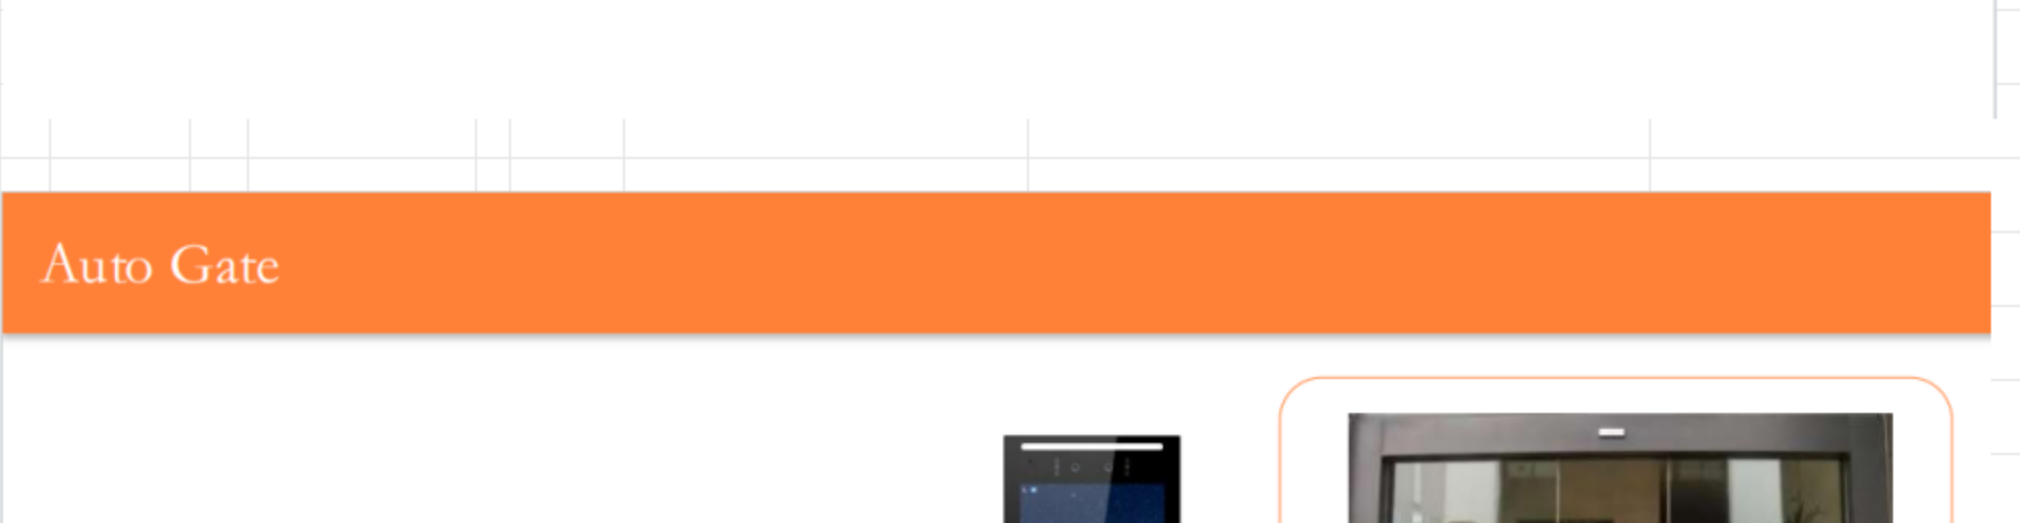

- Up to 10 Intercom Call Stations
- Up to 16 IP Cameras
- 4-Way Display Simultaneously
- Panel and Intercom Call Station in the same Family


- Support IPC Brand: Hikvision, Dahua, Yushi, Huawei, TP-LINK, Tandy, Jovision, HBGK

Mute Lock | motor Lock | spiritual Lock

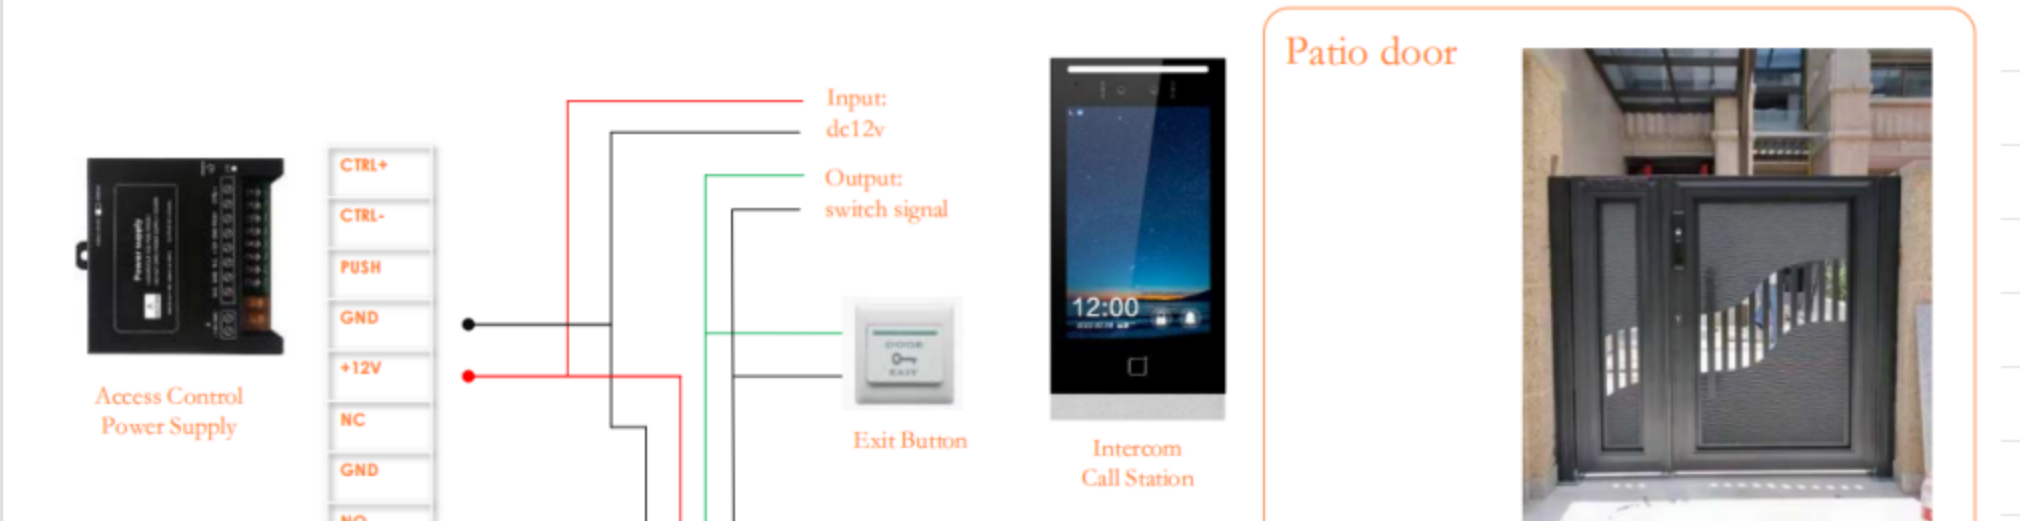

- Common problems and solutions**
- Adjust the opening time. A: Figure knob.
 - The intercom call station reboot immediately after the door is opened. A: This is a typical power shortage. First of all, the power supply voltage may be insufficient, try to dial the dip switch on the power supply dedicated to the access control to 14.5V and test again. If it still happened, it's probably a wiring problem. Consider replacing or thickening the power supply line to reduce voltage drops on the line.
 - prompt to open the actual door is not open. A: Similar to question 2.
 - Aged lines and poor quality power lines have the correct voltage in no-load measurement, but the voltage drops significantly when the load is working.
 - High quality power supply is the guarantee of stable operation of equipment.

Electric bolt Lock

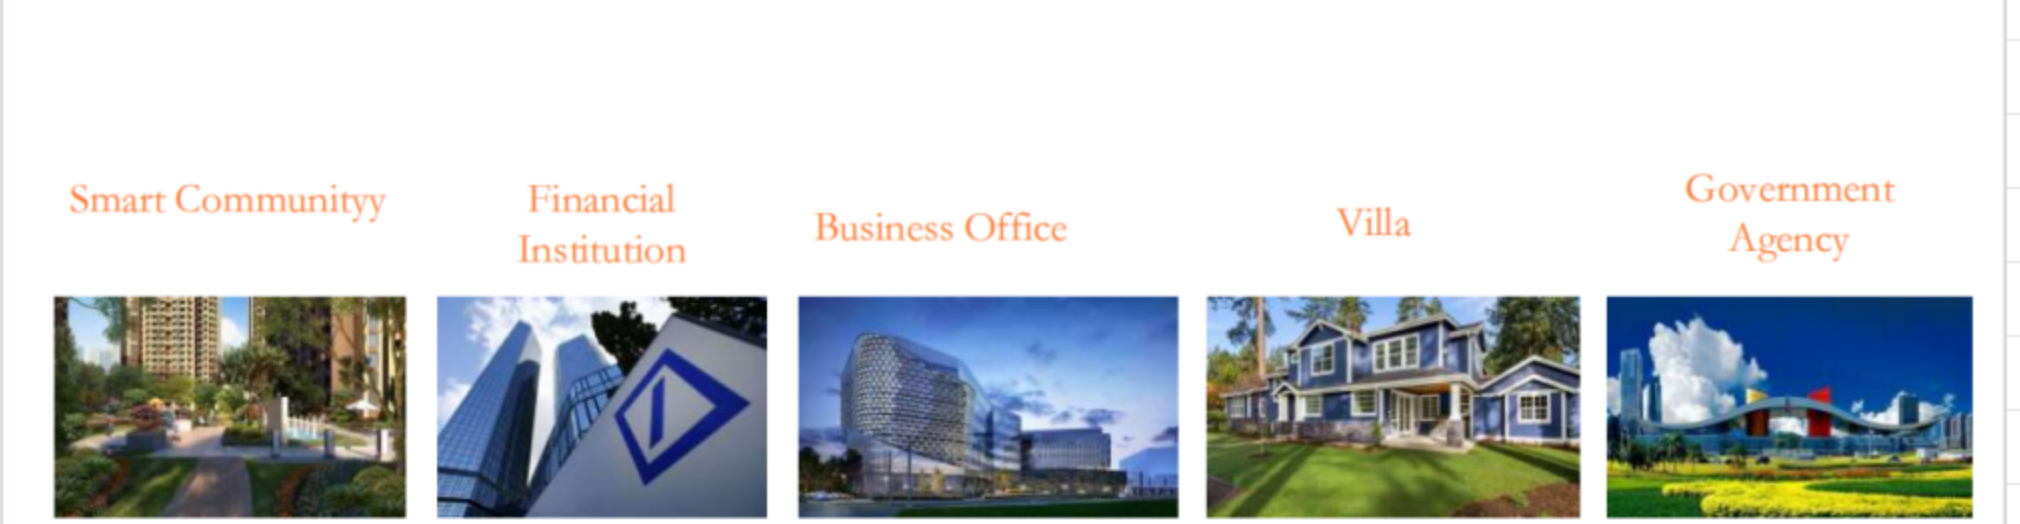

- Common problems and solutions**
- Adjust the opening time. A: Figure knob.
 - The intercom call station reboot immediately after the door is opened. A: This is a typical power shortage. First of all, the power supply voltage may be insufficient, try to dial the dip switch on the power supply dedicated to the access control to 14.5V and test again. If it still happened, it's probably a wiring problem. Consider replacing or thickening the power supply line to reduce voltage drops on the line.
 - prompt to open the actual door is not open. A: Similar to question 2.
 - Aged lines and poor quality power lines have the correct voltage in no-load measurement, but the voltage drops significantly when the load is working.
 - High quality power supply is the guarantee of stable operation of equipment.

Auto Gate

Fingerprint Lock

Wireless 433 receiver built-in fingerprint lock

Application Scenario

The most innovative building video intercom brand

